




COMBINATION BARS

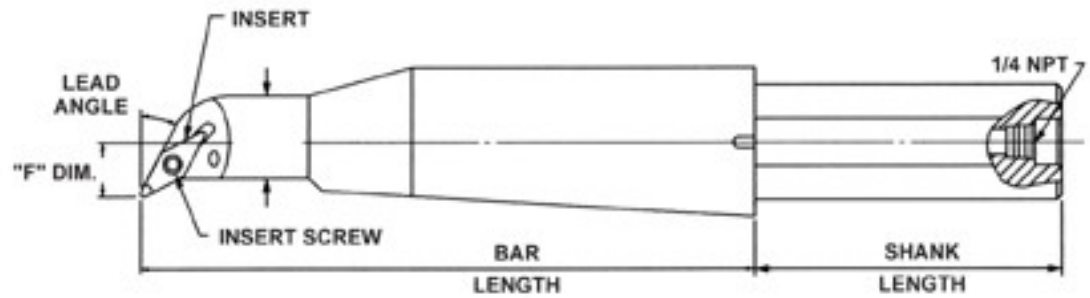

PRODUCT	PART NO.	INSERT TYPE	SHANK DIA	SHANK LENGTH	EFFECTIVE LENGTH	"F" DIM	LEAD ANGLE	INSERT SCREW	O RING
---------	----------	-------------	-----------	--------------	------------------	---------	------------	--------------	--------

2" DIA. SHANK-INT. COOL. PORT									
COMBO/RELIEVED	TNH-SRG-301R	VPGA/Z 443 CARBIDE OR PCD	2.000	5.000	8.500	0.875	-27.5 °	10-32 x 3/4 SHCS	N/A
COMBO/RELIEVED	TNH-SRG-302R	VPGA/Z 443 CARBIDE OR PCD	2.000	5.000	10.000	0.875	-27.5 °	10-32 x 3/4 SHCS	N/A
COMBO/RELIEVED	TNH-SRG-311R	VPGA/Z 443 CARBIDE OR PCD	2.000	5.000	8.500	0.875	-27.5 °	10-32 x 3/4 SHCS	N/A
COMBO/RELIEVED	TNH-SRG-312R	VPGA/Z 443 CARBIDE OR PCD	2.000	5.000	10.000	0.875	-27.5 °	10-32 x 3/4 SHCS	N/A
COMBINATION	TNH-SRG-327R/L	VPGA/Z 443 CARBIDE OR PCD	2.000	5.000	6.500	0.875	-27.5 °	10-32 x 3/4 SHCS	N/A
COMBINATION	TNH-SRG-336R	VPGA/Z 443 CARBIDE OR PCD	2.000	5.000	10.000	0.875	-27.5 °	M 3.5-TX 15	N/A
BORING	TNH-SRG-339R	VCGX 331 CARBIDE OR PCD	2.000	5.000	8.500	1.000	-12.5 °	10-32 x 3/4 SHCS	N/A
COMBINATION	TNH-SRG-340R	VPGA/Z 443 CARBIDE OR PCD	2.000	5.000	8.500	1.000	-27.5 °	10-32 x 3/4 SHCS	N/A
COMBINATION	TNH-SRG-350R	VPGA/Z 443 CARBIDE OR PCD	2.000	5.000	10.000	1.000	-27.5 °	10-32 x 3/4 SHCS	N/A
2.5" DIA. SHANK-O.D. O-RING SEAL									
COMBO/RELIEVED	TNK-SKG-226R/L	VPGA/Z 443 CARBIDE OR PCD	2.500	5.000	8.500	1.625	-27.5 °	10-32 x 3/4 SHCS	141
BORING	TNK-SKG-239R/L	VCGX 331 CARBIDE OR PCD	2.500	5.000	6.500	1.1875	-3.0 °	M 3.5-TX 15	141
COMBINATION	TNK-SKG-240R	VPGA/Z 443 CARBIDE OR PCD	2.500	5.000	8.500	1.625	-27.5 °	10-32 x 3/4 SHCS	141
COMBINATION	TNK-SKG-256R	VPGA/Z 443 CARBIDE OR PCD	2.500	5.000	8.500	1.125	-27.5 °	10-32 x 3/4 SHCS	141
COMBINATION	TNK-SKG-259R/L	VCGX 331 CARBIDE OR PCD	2.500	5.000	8.500	1.1875	-3.0 °	M 3.5-TX 15	141
COMBINATION	TNK-SKG-266R	VPGA/Z 443 CARBIDE OR PCD	2.500	5.000	10.000	1.125	-27.5 °	10-32 x 3/4 SHCS	141
BORING	TNK-SKG-269R	VPGA/Z 443 CARBIDE OR PCD	2.500	5.000	10.000	1.3125	-3.0 °	10-32 x 3/4 SHCS	141
COMBINATION	TNK-SKG-276R	VPGA/Z 443 CARBIDE OR PCD	2.500	5.000	10.000	1.625	-27.5 °	10-32 x 3/4 SHCS	141
BORING	TNK-SKG-279R	VPGA/Z 443 CARBIDE OR PCD	2.500	5.000	8.500	1.3125	-3.0 °	10-32 x 3/4 SHCS	141
63MM. DIA. SHANK-O.D. O-RING SEAL									
COMBINATION	MTNK-SKG-226R/L	VPGA/Z 443 CARBIDE OR PCD	63MM	5.000	8.500	1.625	-27.5 °	10-32 x 3/4 SHCS	140
BORING	MTNK-SKG-239R/L	VCGX 331 CARBIDE OR PCD	63MM	5.000	6.500	1.1875	-3.0 °	M 3.5-TX 15	140
COMBINATION	MTNK-SKG-240R	VPGA/Z 443 CARBIDE OR PCD	63MM	5.000	8.500	1.625	-27.5 °	10-32 x 3/4 SHCS	140
COMBO/RELIEVED	MTNK-SKG-256R	VPGA/Z 443 CARBIDE OR PCD	63MM	5.000	8.500	1.125	-27.5 °	10-32 x 3/4 SHCS	140
BORING	MTNK-SKG-259R	VCGX 331 CARBIDE OR PCD	63MM	5.000	8.500	1.1875	-3.0 °	M 3.5-TX 15	140
COMBO/RELIEVED	MTNK-SKG-266R	VPGA/Z 443 CARBIDE OR PCD	63MM	5.000	10.000	1.125	-27.5 °	10-32 x 3/4 SHCS	140
BORING	MTNK-SKG-269R	VPGA/Z 443 CARBIDE OR PCD	63MM	5.000	10.000	1.3125	-3.0 °	10-32 x 3/4 SHCS	140
COMBINATION	MTNK-SKG-276R	VPGA/Z 443 CARBIDE OR PCD	63MM	5.000	10.000	1.625	-27.5 °	10-32 x 3/4 SHCS	140
BORING	MTNK-SKG-279R	VPGA/Z 443 CARBIDE OR PCD	63MM	5.000	8.500	1.3125	-3.0 °	10-32 x 3/4 SHCS	140

ASI WORKHOLDING, INC.

1258 Fendt Drive, Howell, MI 48843 517-540-0400 Fax: 517-540-0375 toolsales@asichuck.com